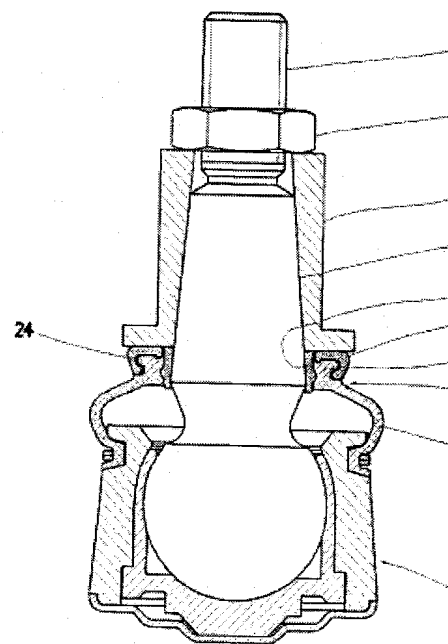


**Pivot linkage sealing device provided by cuff sealed around outside of pivot pin and bellows attached to mounting****Publication number:** DE10207779**Publication date:** 2003-10-30**Inventor:** KRICKE MARTIN (DE); SCHULD OLIVER (DE)**Applicant:** PAGUAG GMBH (DE)**Classification:****- international:** F16C11/06; F16J3/04; F16C11/06; F16J3/00; (IPC1-7): F16J3/04; F16C11/06**- european:** F16C11/06E2; F16J3/04B2**Application number:** DE20021007779 20020223**Priority number(s):** DE20021007779 20020223[Report a data error](#)**Abstract of DE10207779**

The sealing device (1) uses a cuff (3) with its inside surface sealed around the outside of the pivot pin of the ball and socket pivot linkage (2) and its outside surface cooperating with the mouth (9) of a sealing bellows (4) attached to the pivot mounting. The cuff has a closure with pivoted grips (14) for clamping the mouth of the bellows around the outside of the cuff by cooperation with an outward projecting rolled edge of the sealing bellows.

Data supplied from the **esp@cenet** database - Worldwide